




Xbox One Wireless Controller Buttons Replacement

Remove the buttons from the controller.

Written By: Garrett George

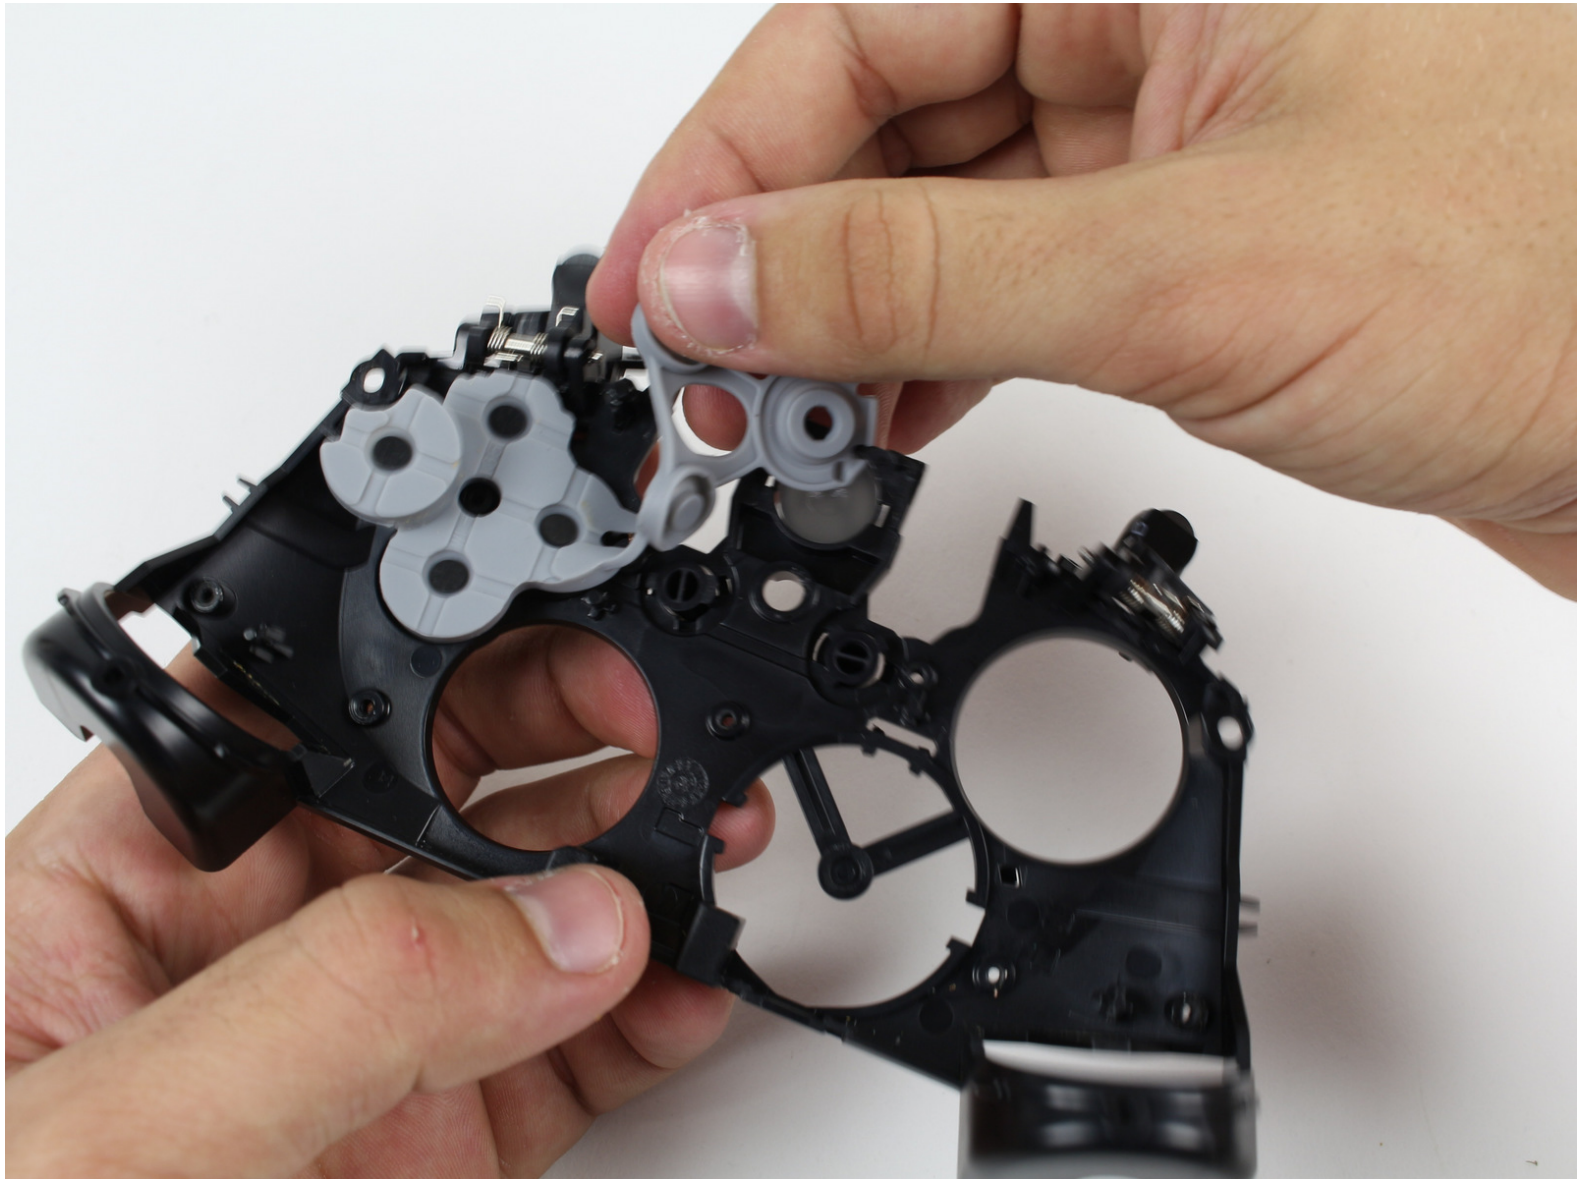

INTRODUCTION

This guide will teach you how to remove the buttons.



TOOLS:

- [T8 Torx Screwdriver](#) (1)
- [T6 Torx Screwdriver](#) (1)
- [Tweezers](#) (1)
- [Soldering Station](#) (1)
- [Spudger](#) (1)



PARTS:

- [Xbox One Controller Action Button Gasket](#) (1)
- [Xbox One Controller Action Button Covers](#) (1)

Step 1 — Battery Pack



- Remove the battery pack cover.
- Remove batteries.

Step 2 — Side Handles



 We recommend using a nylon spudger for this step. A metal spudger is shown.

- Grip the controller firmly to remove the side handles, wedging a spudger into the seam between the front and handle plates.
- Pry the side plate away from the front plate by moving the spudger back and forth. You will need to do this all the way around the side plate's seam.

Step 3 — Screws



- ❗ There is a hidden screw located in the middle of the controller behind the label.
- Use a screwdriver and punch a hole directly in the center of the label.
- ❗ You may also lift the label if you do not want to puncture it.
- Remove the five 10mm screws located on the back of the controller using the T8 Security Torx Screwdriver.

Step 4 — Backplate





- Remove the backplate.


Step 5 — Faceplate




- Remove the faceplate.


Step 6 — Top Motherboard

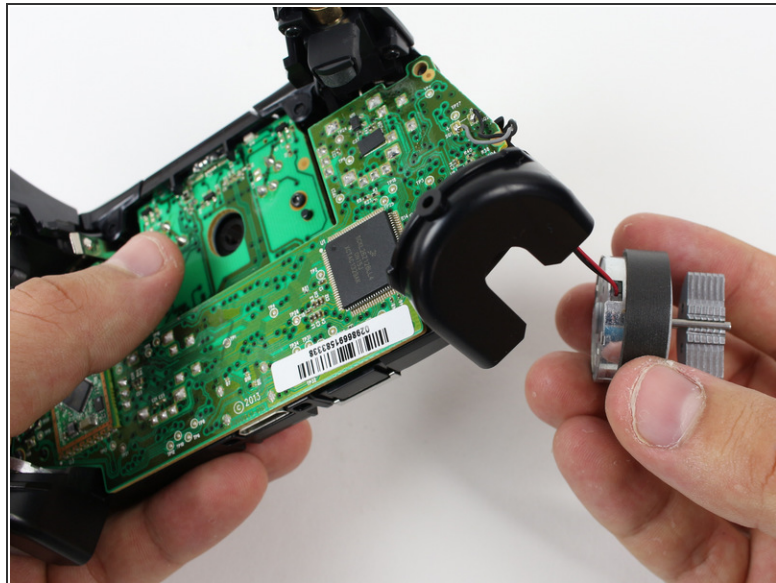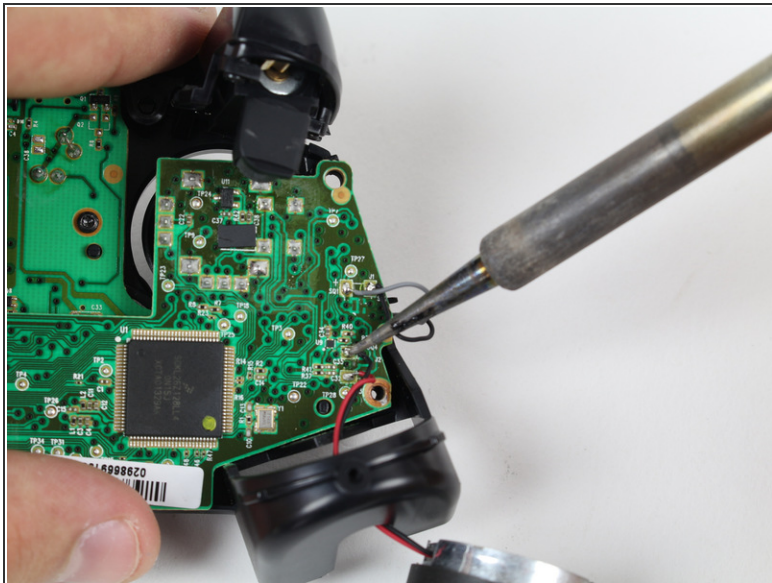

 You may let the rumble motors hang freely out of their sockets.

- De-solder the soldered joints while holding the red and black wires down on the top motherboard.
- De-solder the black and gray wires that are attached to the top motherboard.
- Remove the rumble motors and set them aside.

 Be careful while using the soldering iron not to damage other components or hurt yourself.


 For information on how to solder, [click here](#).

Step 7



- Unscrew the two 7mm T6 screws located near the rumble motor sockets.

Step 8

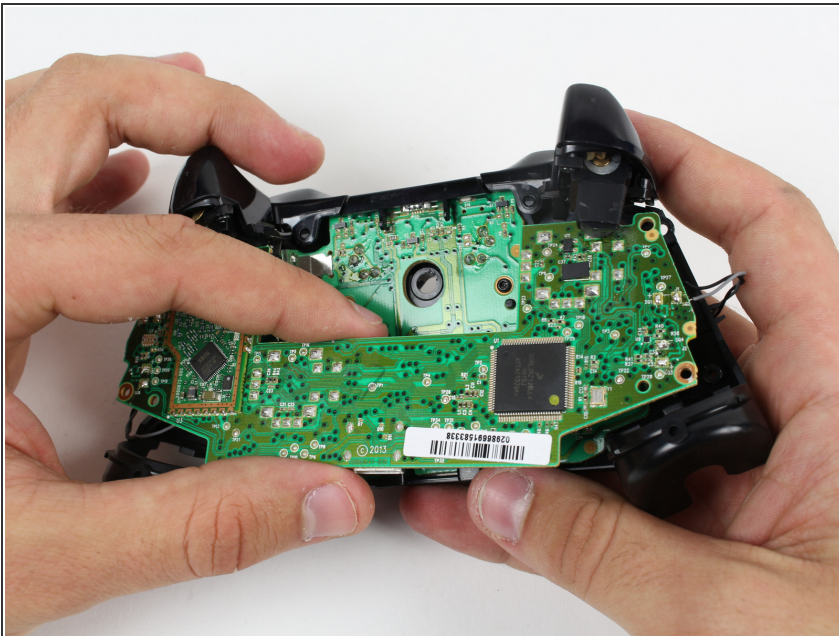

- Firmly grip sides of motherboard near the middle.
- Lift upwards while slightly wiggling the motherboard forward and backward.
- ⓘ Lifting the motherboard will require some force.

Step 9 — Bottom Motherboard



- Remove the six T6 Torx screws located on the bottom motherboard.

Step 10



- Remove the bumpers by prying them off of the pegs that secure them, using a spudger. They are located on the front and back of the controller.





A standard nylon spudger is recommended for this step. Using a metal spudger near the motherboard as shown risks damaging your device.

Step 11




- Lift the piece surrounding the Home button off of its pegs.
- Pry it off of the other side, using a spudger on the pins.

 A standard nylon spudger is recommended for this step. Using a metal spudger near the motherboard as shown risks damaging your device.

 Removing this piece may require a lot of force.

Step 12

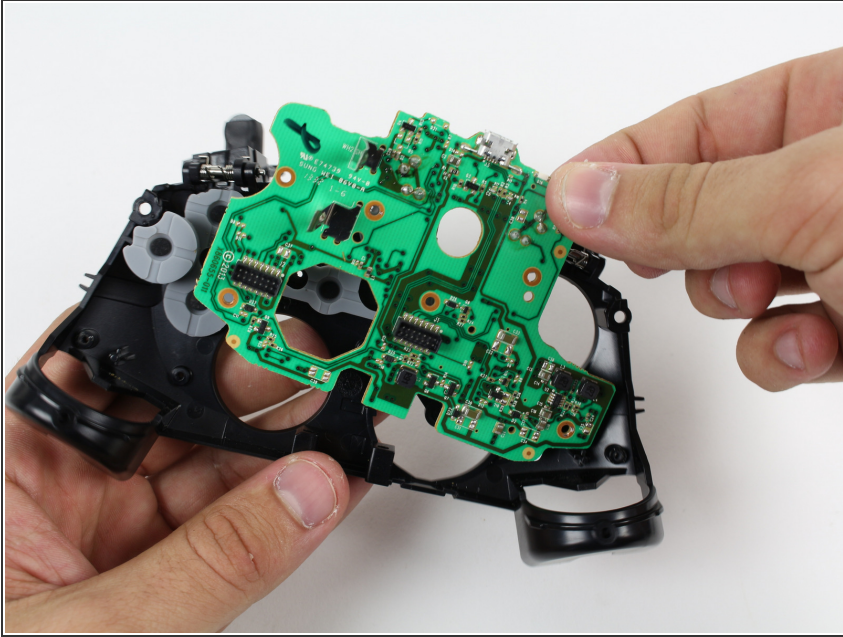


- Remove the bottom motherboard.

Step 13 — Buttons



- Remove the rubber backing to the buttons.

Step 14

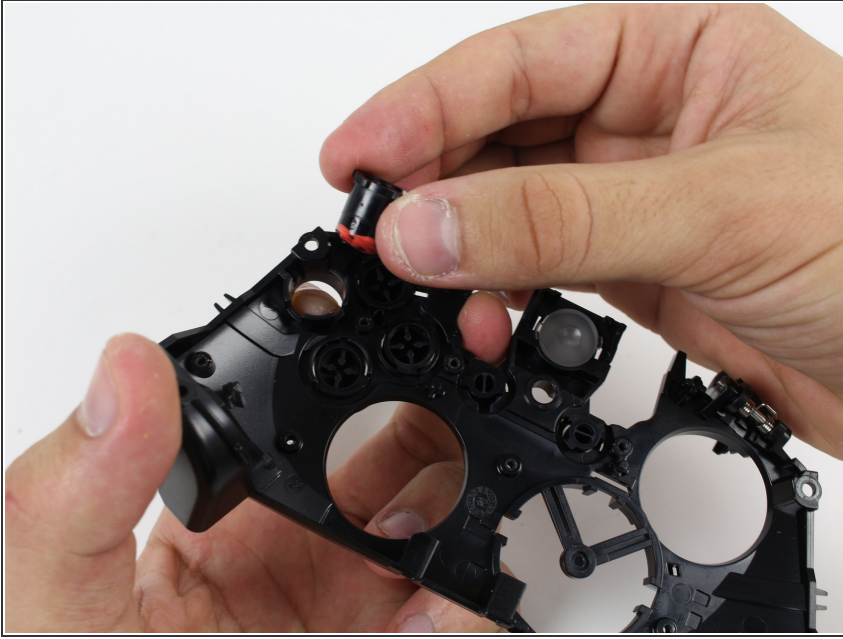

- With the buttons facing down, push them up out of their housings, and remove.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-10-21 10:21:19 AM.